



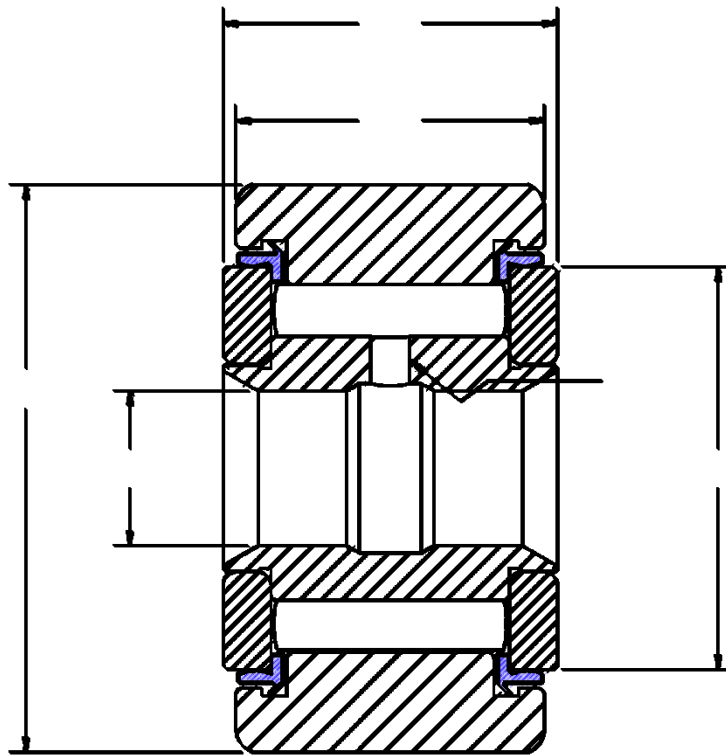

APPLICATION WORKSHEET

Company:		Contact Name:		Phone:	
Street Address:			City:		State:
Email:			Industry Type:		
Will you require CARTER to sign an NDA? Yes <input type="checkbox"/> No <input type="checkbox"/>					
Bearing Application Features					
Modification of a STANDARD Bearing? Yes <input type="checkbox"/> No <input type="checkbox"/> Manufacturer:					
Do you have any drawings of the original bearing from the previous manufacture our engineers can review? Yes <input type="checkbox"/> No <input type="checkbox"/>					
If applicable, can we get a sample of the existing bearing? Yes <input type="checkbox"/> No <input type="checkbox"/>					
Is this a NEW design? Yes <input type="checkbox"/> No <input type="checkbox"/>					
What will be the main function of the bearing?					
Main advantage being sought in bearing application?					
Bearing Specifics					
Material Needed:					
Outer Material/Plating:					
Lubrication Yes <input type="checkbox"/> No <input type="checkbox"/>			FDA Approval? Yes <input type="checkbox"/> No <input type="checkbox"/>		
Double Needle Row Yes <input type="checkbox"/> No <input type="checkbox"/>					
Yoke Roller (Shaft Mount)			Cam Follower (Threaded Stud Mount)		
Crowned	<input type="checkbox"/>	Crowned	<input type="checkbox"/>	Eccentric Sleeve	<input type="checkbox"/>
Sealed	<input type="checkbox"/>	Sealed	<input type="checkbox"/>	Stud Configuration:	
		Hex	<input type="checkbox"/>		
LOADS Will the bearing be supporting any shock Loads? Yes <input type="checkbox"/> No <input type="checkbox"/> Shock Load:					
Maximum Radial Load:			Maximum Axial Load:		
SPEEDS AND MOTION Maximum rpm the bearing will be turning? For how long?					
Will this bearing be used in Full Rotation Yes <input type="checkbox"/> No <input type="checkbox"/>			Oscillating Yes <input type="checkbox"/> No <input type="checkbox"/>		
Bearing Application DATA					
Temperature Range Bearing Would be Subject To:		HIGH		LOW	
<i>If the High Temperature is above 230°F, the seals will start to fail. Some applications are considered High Temp or Low Temp which requires an alternative grease to our standard.</i>					
Moisture Level					
<input type="checkbox"/> Washdown Wash		Chemicals Yes <input type="checkbox"/> No <input type="checkbox"/> Please List:			
<input type="checkbox"/> Marine Usage		<input type="checkbox"/> Near Saltwater		<input type="checkbox"/> Saltwater Splash	
<input type="checkbox"/> Entirely Submerged					
Particulates and/or Debris Yes <input type="checkbox"/> No <input type="checkbox"/>					
<input type="checkbox"/> Sand		<input type="checkbox"/> Baking Flour		<input type="checkbox"/> Other debris please list:	

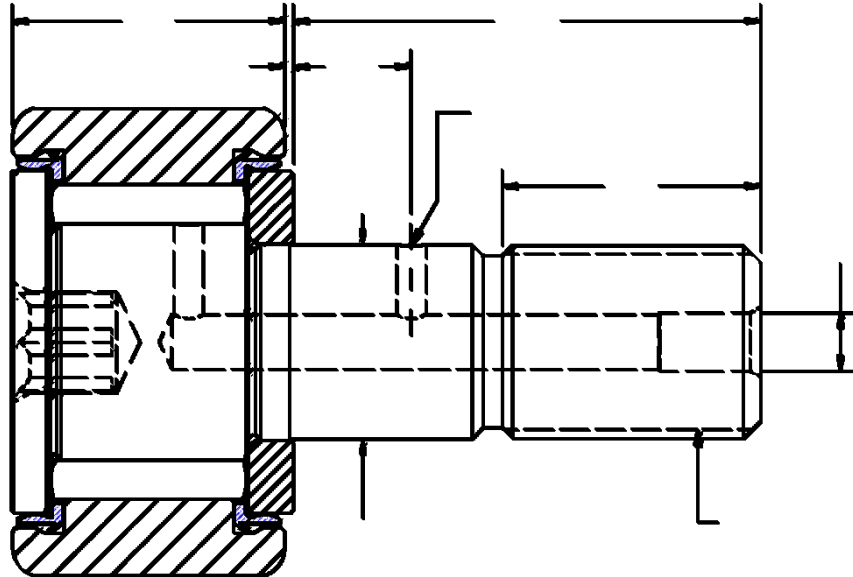

CARTER Mfg.
SALES: 616.842.8760
SALES FAX 800.842.0644
SALES EMAIL: sales@carterbearings.com
carterbearings.com
 ISO9001:2015 QMS Certified by Intertek