DRW. NO. **CSCE-36-SB**

NOTES:
1. **BEARING IS PACKED WITH LUBRIPLATE SFL-2 GREASE**



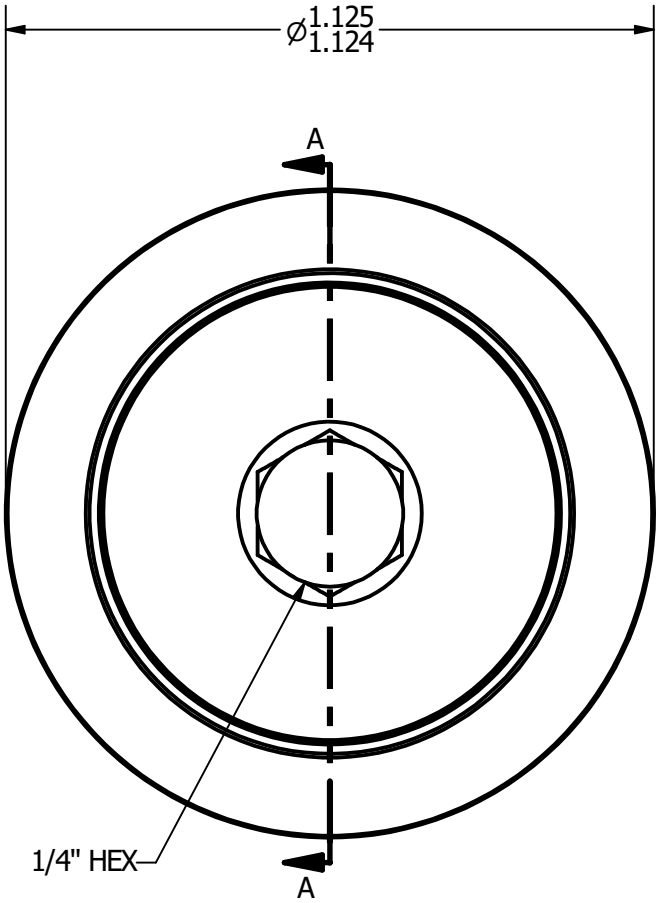

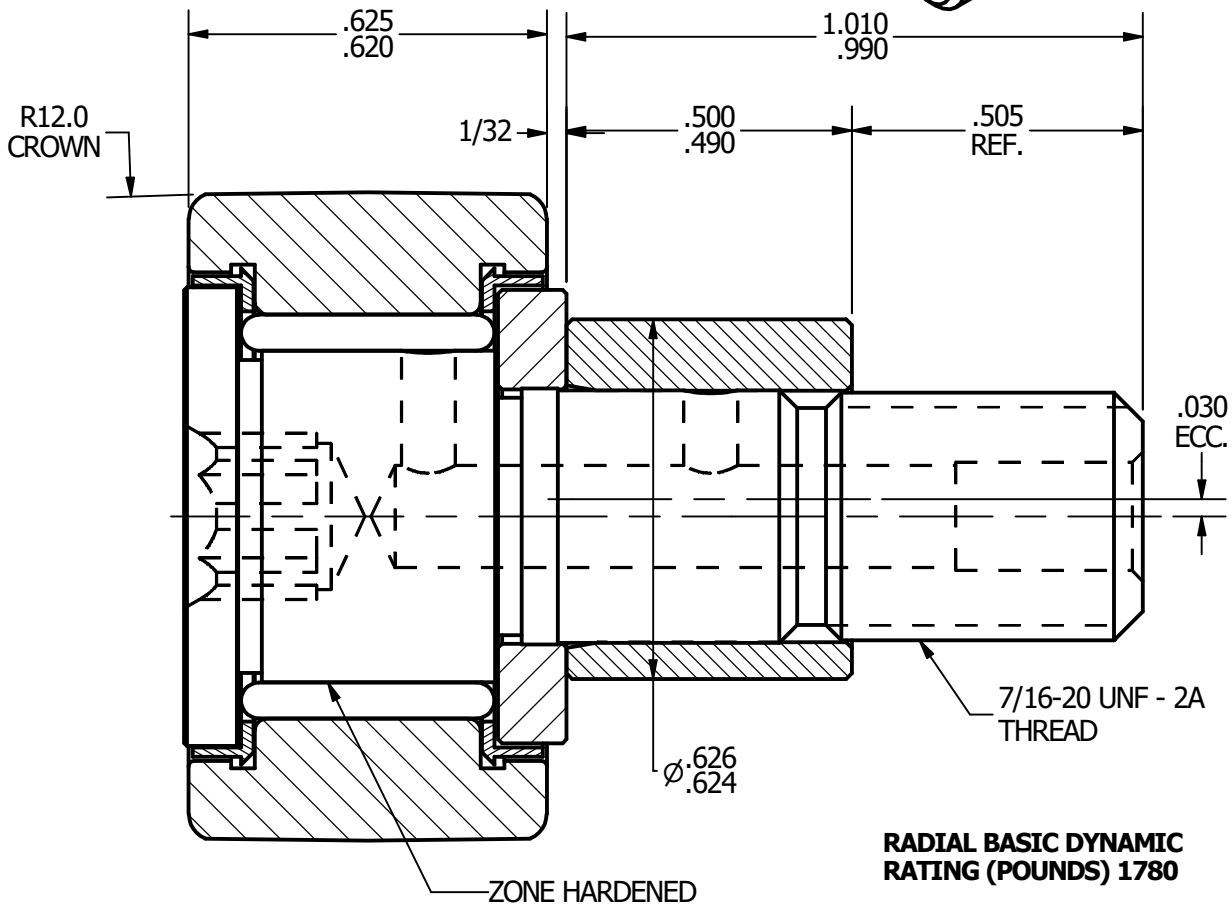

RADIAL BASIC DYNAMIC RATING (POUNDS) 1780

MAXIMUM STATIC CAPACITY (POUNDS) 2448

MATERIAL NOTES:

OUTER - 440C STAINLESS STEEL, HEAT TREATED
STUD - 440C STAINLESS STEEL, ZONE HARDENED
ROLLER - 440C STAINLESS STEEL, HEAT TREATED
WASHER - 440C STAINLESS STEEL, HEAT TREATED
ECCENTRIC SLEEVE - 303 STAINLESS STEEL
SEAL - SYNTHETIC

CUSTOMER PART#

.XX = ± .01
.XXX = ± .005
.XXXX = ± .0005
ANGLES = ± 1˚
INCH [METRIC]

CHANGE NOTE:

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

REVISION

A	AUTHOR. BY	DRAWN BY	CHK'D BY	SALES	MATERIAL
	JGV	JAF	JGV	KPR	NOTED
REV. BY	DATE	DATE	DATE	DATE	DRAWING NO.
JAF	7/25/2006	7/25/2006	7/25/2006	7/25/2006	**CSCE-36-SB**

CARTER MANUFACTURING CO., INC.
GRAND HAVEN, MICHIGAN 49417

PART NAME: **ASSEMBLY** SHEET 1 OF 2