
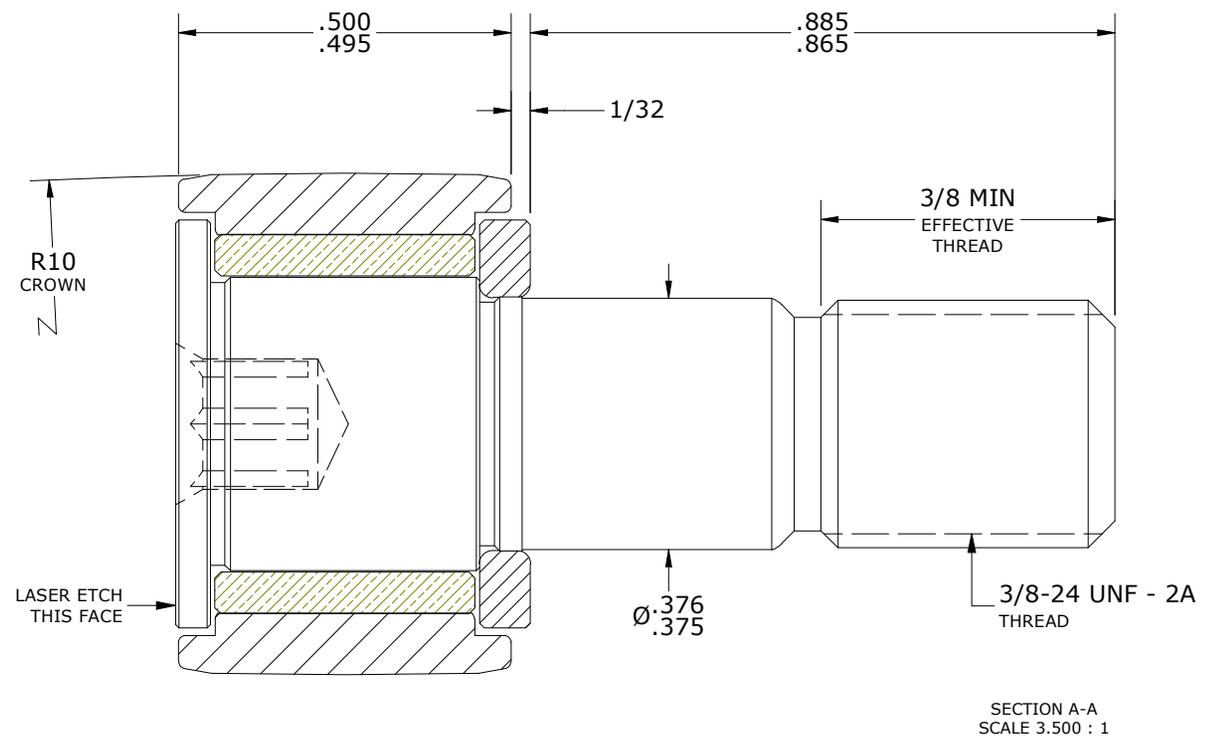
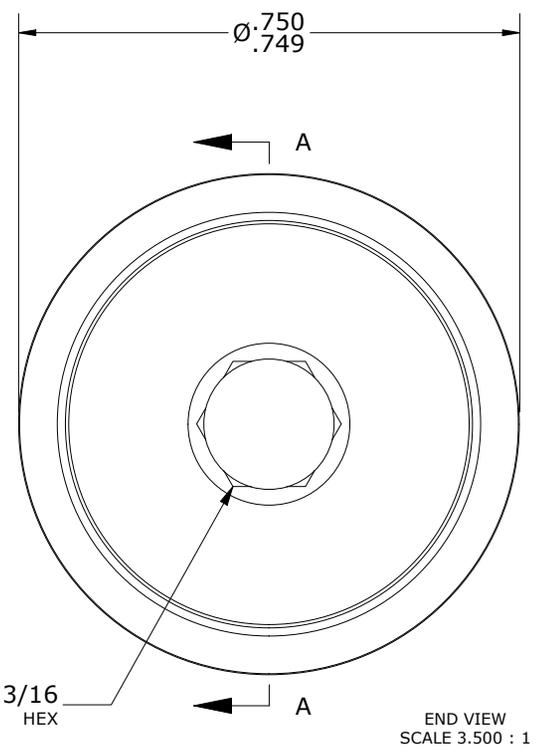


RECOMMENDED MOUNTING HOLE Ø		
Limit	Inch	mm
MIN	.3750	9.5250
MAX	.3755	9.5377

MAXIMUM CLAMPING TORQUE**	
Inch lbf	Nm
47.5	5.5

- NOTES:
- BUSHING IS IMPREGNATED WITH CARTER STANDARD NEVERLUBE LUBRICANT.
 - ALL EXPOSED SURFACES HAVE BLACK OXIDE.
 - CUSTOM LASER ETCHING IS AVAILABLE UPON REQUEST.

MS NO. _____ NSN NO. _____ DRAWING NO. CSFH-24-A

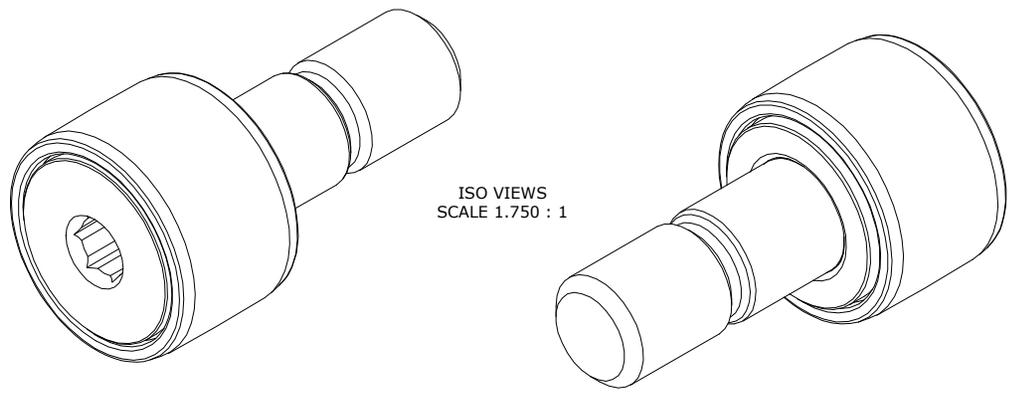

**TORQUE SPECIFICATION IS BASED ON LUBRICATED THREADS, IF USING DRY THREADS DOUBLE TORQUE VALUE

MATERIAL NOTES:

OUTER RING - BEARING STEEL, HEAT TREATED
 STUD - STEEL
 WASHER - BEARING STEEL, HEAT TREATED
 BUSHING - SINTERED BRONZE
 SEAL(S) - SYNTHETIC

CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 2' INCH [METRIC] FRACTION = ± 1/64
ENGINEERING CHANGE ORDER NOTE	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS				CARTER MANUFACTURING CO., INC. GRAND HAVEN, MICHIGAN 49417			
REVISION				PART NAME: ASSEMBLY		PRODUCT TYPE: Neverlube™	
C	AUTHOR BY HG	DRAWN BY GJP	CHK'D BY MD	SALES NC	MATERIAL NOTED		
REVISION BY SGW	DATE 4/12/2022	DATE 9/7/2000	DATE 4/11/2022	DATE 4/12/2022	SHEET 1 OF 2		