

LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	14,200
DYNAMIC THRUST LOAD	12,000
MAXIMUM STATIC CAPACITY	26,000

NOTES:



1. BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE (UNLESS OTHERWISE SPECIFIED)
2. STUD, WASHER, ECCENTRIC SLEEVE, & END CAP: ALL EXPOSED SURFACES HAVE BLACK OXIDE

MS NO.


NSN NO.

DRAWING NO.

FHRE-300-A

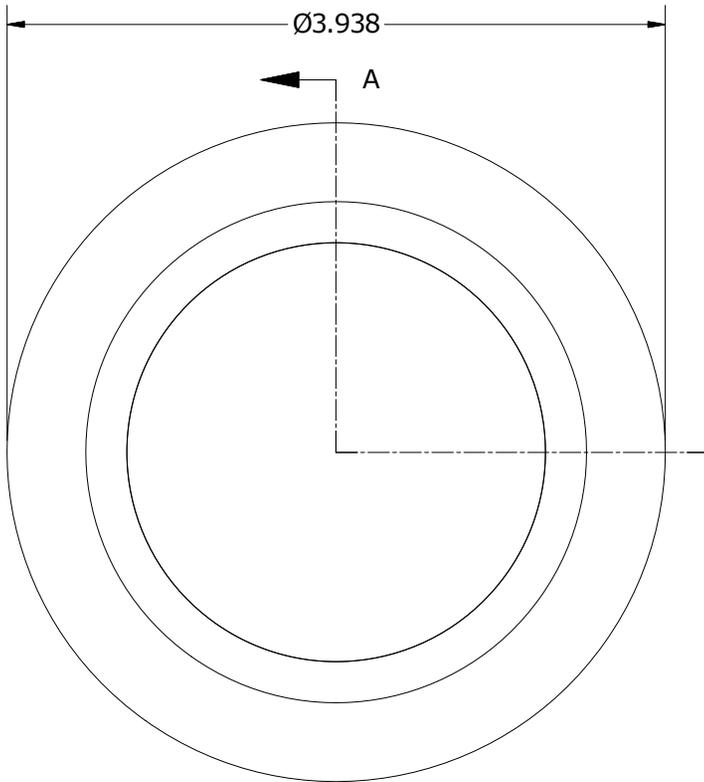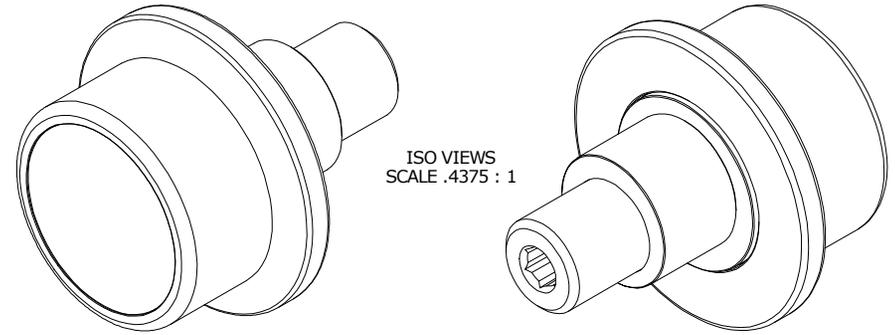

END VIEW  
SCALE .875 : 1

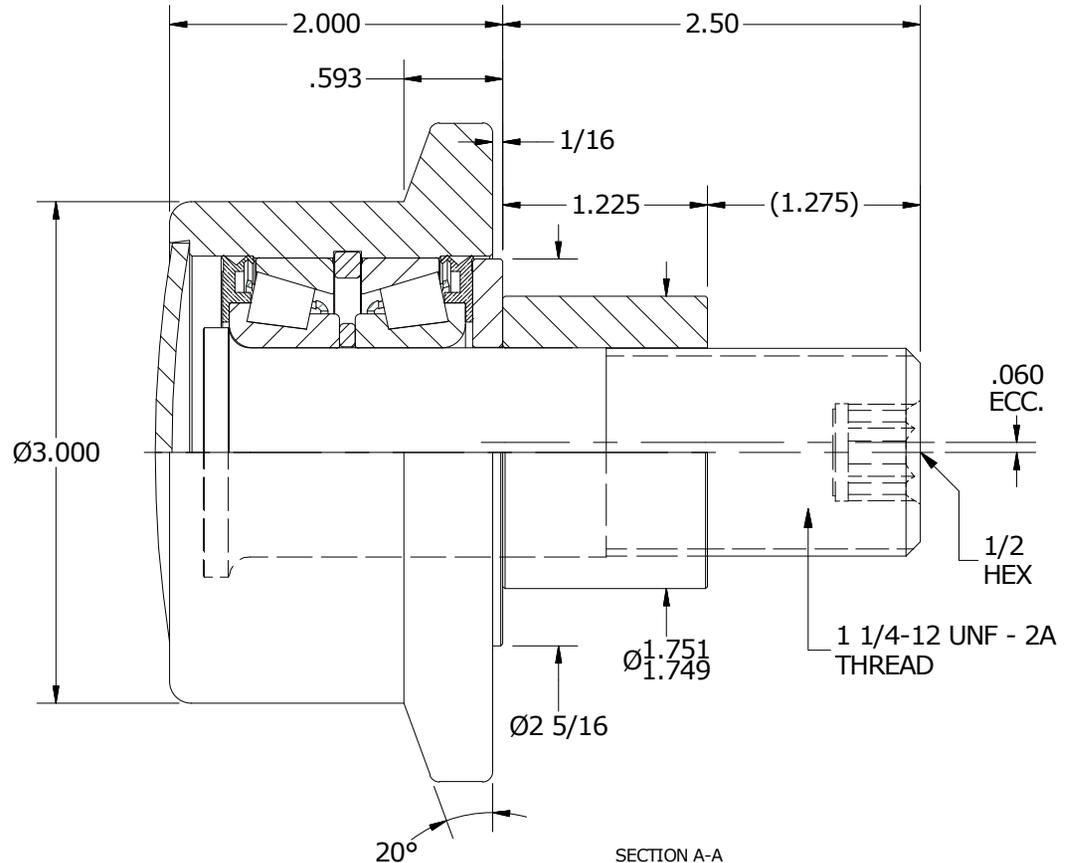

MATERIAL NOTES:

OUTER ROLLER - BEARING STEEL, HEAT TREATED  
 STUD - COLD ROLLED STEEL  
 BEARING ASSEMBLY - LM67000LA-902A2  
 WASHER - COLD ROLLED STEEL  
 END CAP - COLD ROLLED STEEL  
 ECCENTRIC SLEEVE - COLD ROLLED STEEL

CUSTOMER PART#

XX = ± .01  
 XXX = ± .005  
 XXXX = ± .0005  
 ANGLES = ± 1'  
 INCH [METRIC]  
 FRACTION = ± 1/32

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

**CARTER MANUFACTURING CO., INC.**

GRAND HAVEN, MICHIGAN 49417

REVISION

PART NAME: ASSEMBLY

ENGINEERING CHANGE ORDER NOTE

D

AUTHOR BY  
HG

DRAWN BY  
SGW

CHK'D BY  
SGW

SALES  
KR

MATERIAL  
NOTED

REVISION BY  
MD

DATE  
6/6/2017

DATE  
11/1/2007

DATE  
6/6/2017

DATE  
5/10/2010

SHEET  
1 OF 2